SOUTHBELT INC.

HOUSTON
8518 SOUTH LOOP EAST
HOUSTON, TX 77017
713-645-9099

DALLAS
4525 MAXEY RD
ALVARADO, TX 76009
682-518-6622

SAN MARCOS
1110 FM 1339
KINGSBURY, TX 78638
830-372-8929

SOUTHBELT REPAIR AND SUPPLY INC.

SERVING THE CEMENT AND INDUSTRIAL INDUSTRIES



BP-14

AUGERLESS PLANT

CEMENT BATCHER

- 14YD CEMENT BATCHER
- 4 - 10K LOAD CELLS AND SUMMING BOX
- 10” BUTTERFLY VALVE
- 2 - AERATION PADS
- TURBINE AIR VIBRATOR
- HANGER LUGS
- BANK OF SMC SOLENOIDS MOUNTED ON CEMENT BATCHER

BATCHING SILO

- 400 BBL TO 1900 BBL
- C&W SILO COLLECTORS
- 4” INTERNAL FILL LINE
- 8 - AERATION PADS
- SAFETY PRESSURE RELIEF VALVE
- SERVICE PLATFORM AROUND CEMENT BATCHER
- LADDER & CAGE
- 10”BUTTERFLY VALVE
- MANUAL EMERGENCY GATE
- HI BINDICATORS

SCAN ME

WWW.SOUTHBELTINC.COM



OVERHEAD BINS

- 2 CLAM GATES PER COMPARTMENT.
- CASTED HARDENED GATE GEAR.
  with grease certification.
- 4" X 10 AIR CYLINDER.
- HEAP PLATES.
- BINS FABRICATED OUT OF A-36 1/4" PLATE.
- OPTIONAL AR LINERS ON SLOPING SIDES.



12 FT X 12 FT LOADER HOPPER

HOPPER CONSTRUCTED OF A-36 1/4" STEEL
HOPPER LEGS: 6 X 6 ANGLE - TURBINE VIBRATOR
OPTIONAL AR LINERS ON SLOPING SIDES

RADIAL STACKER

DODGE REDUCER - ELECTRIC MOTOR - V BELT DRIVE WITH GUARD
TAIL PULLEY GUARD - LOADING SKIRT UNDER AGGREGATE BATCHER
2-PLY CONVEYOR BELT - CONTROL PANEL WITH REMOTE SYSTEM
OPTIONAL WALKWAY ON ONE SIDE OF STACKER

QUOTES@SOUTHBELTINC.COM

AGGREGATE BATCHER

- 14 CY CAPACITY.
- 4 - 20K LOAD CELLS AND SUMMING BOX.
- SCALE FABRICATED OUT OF A-36 1/4" PLATE.
- 2 CLAM GATES PER COMPARTMENT.
- CASTED HARDENED GATE GEAR
  with grease certification.
- 5" X 10 AIR CYLINDER.
- TURBINE AIR VIBRATOR.
- 4 HANGER LUGS ON EACH CORNER OF THE SCALE.
- BANK OF SMC SOLENOIDS
  mounted on aggregate batcher.
- OPTIONAL AR LINERS ON SLOPING SIDES.

36" BATCH CONVEYOR

DODGE REDUCER - 2 HP MOTOR - V BELT DRIVE WITH GUARD
TAIL PULLEY GUARD - LOADING SKIRT UNDER AGGREGATE BATCHER
2 PLY CONVEYOR BELT - TRUCK LOAD CHUTE

WEIGHED WATER BATCHER

500-GALLON STORAGE TANK - FLOAT SWITCH
500-GALLON BATCHER - 3 - 5K LOAD CELLS AND SUMMING BOX
6" BFV - HANGER LUGS

C&W STATIONARY LOAD SHROUD

C&W CENTRAL COLLECTOR

AERATION BLOWER


ELECTRICAL BOX MOUNTED ON AGGREGATE BATCHER

20 HP AIR COMPRESSOR

SOUTHBELT INC.

BP-14

AUGERLESS PLANT

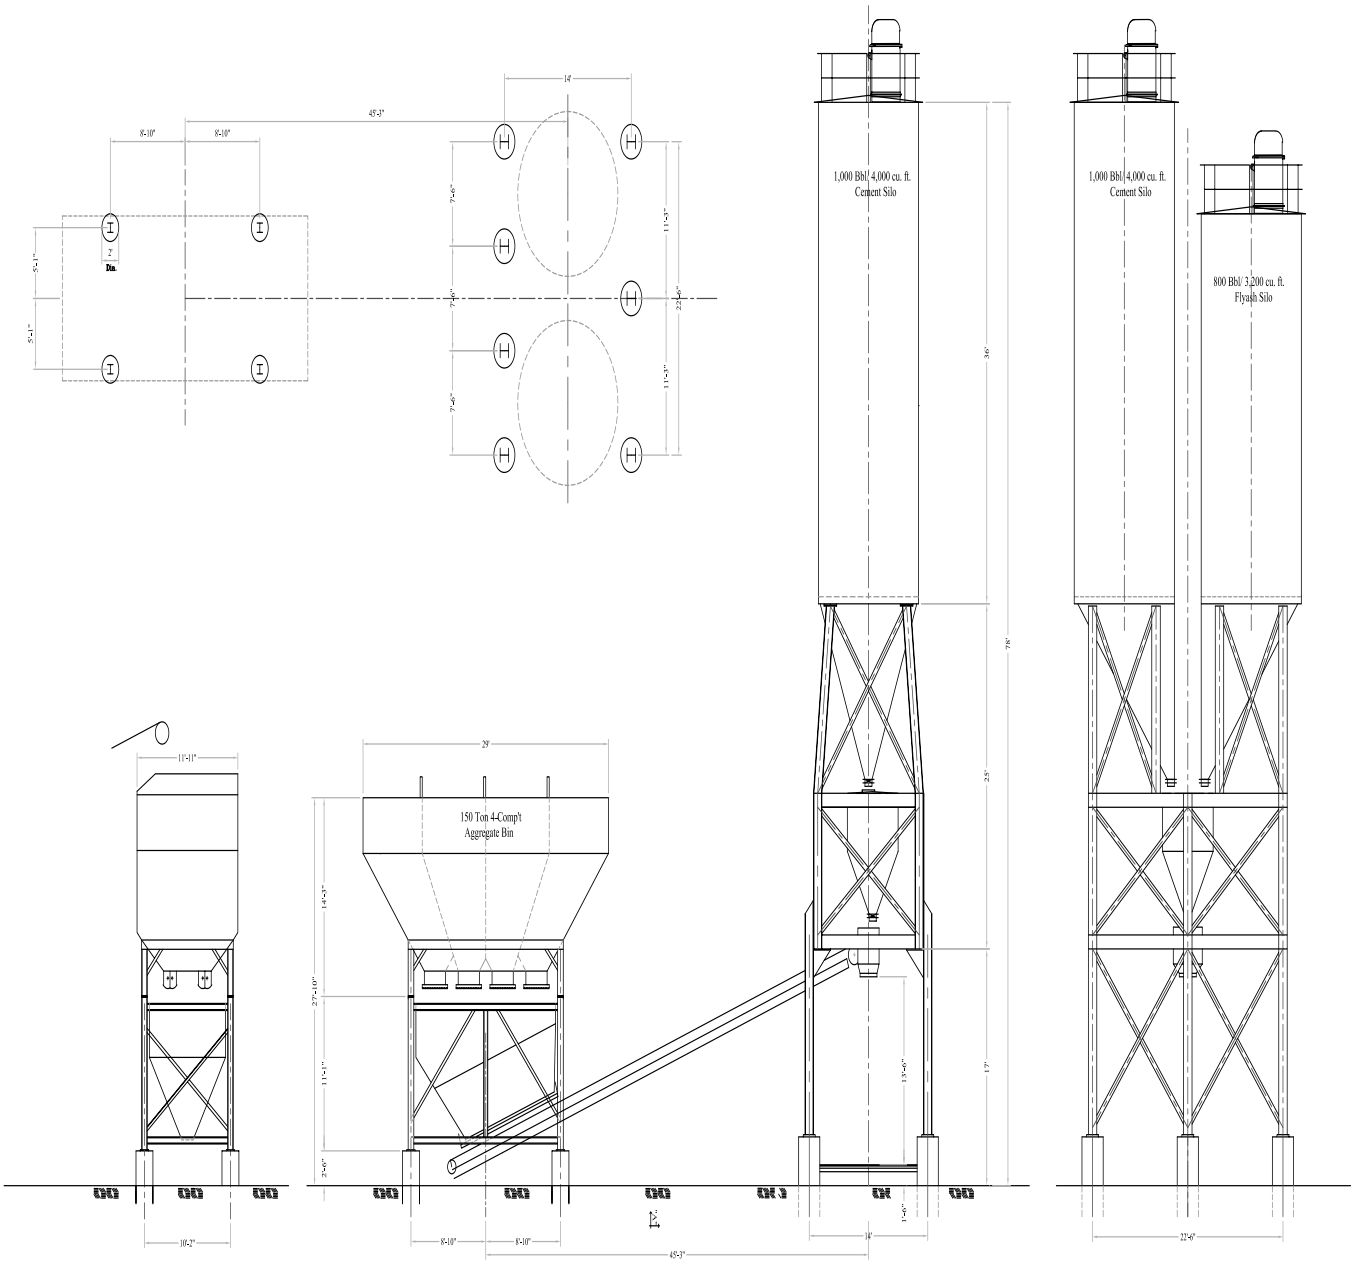

No.	By:	Date:	Revision

Conceptual Drawing Not for Construction

Note: This drawing, including all designs and details, are proprietary to Batch Plants International, Inc.

It is the sole property of BPI and any duplication, use or disclosure with BPI's expressed written consent is strictly prohibited.

Date:

Scale: 3/16"=1'-0"

Re:

Drawn By:

Approved By:

Southbelt Inc.

8514 South Loop East Freeway
Houston, Tx. 77017
713-645-6500 Phone
713-645-5910 Fax

12 Yard Low Proffile Concrete Batch Plant

1,000 Bbl Cement, 800 Bbl Flyash, 150 Ton Aggregate

Rocket Ready-Mix

Sales Order No.

Drawing No.

R-1

SOUTHBELT REPAIR AND SUPPLY INC.

HOUSTON
8518 SOUTH LOOP EAST
HOUSTON, TX 77017
713-645-9099

DALLAS
4525 MAXEY RD
ALVARADO, TX 76009
682-518-6622

SAN MARCOS
1110 FM 1339
KINGSBURY, TX 78638
830-372-8929

SERVING THE CEMENT AND INDUSTRIAL INDUSTRIES

BP-14

AUGERLESS PLANT

SOUTHBELT INC.

SCAN ME

QUOTES@SOUTHBELTINC.COM

WWW.SOUTHBELTINC.COM